




SCREWDRIVER FUNCTION MODULE  
WITH ELECTRONIC STROKE (E-SFM)



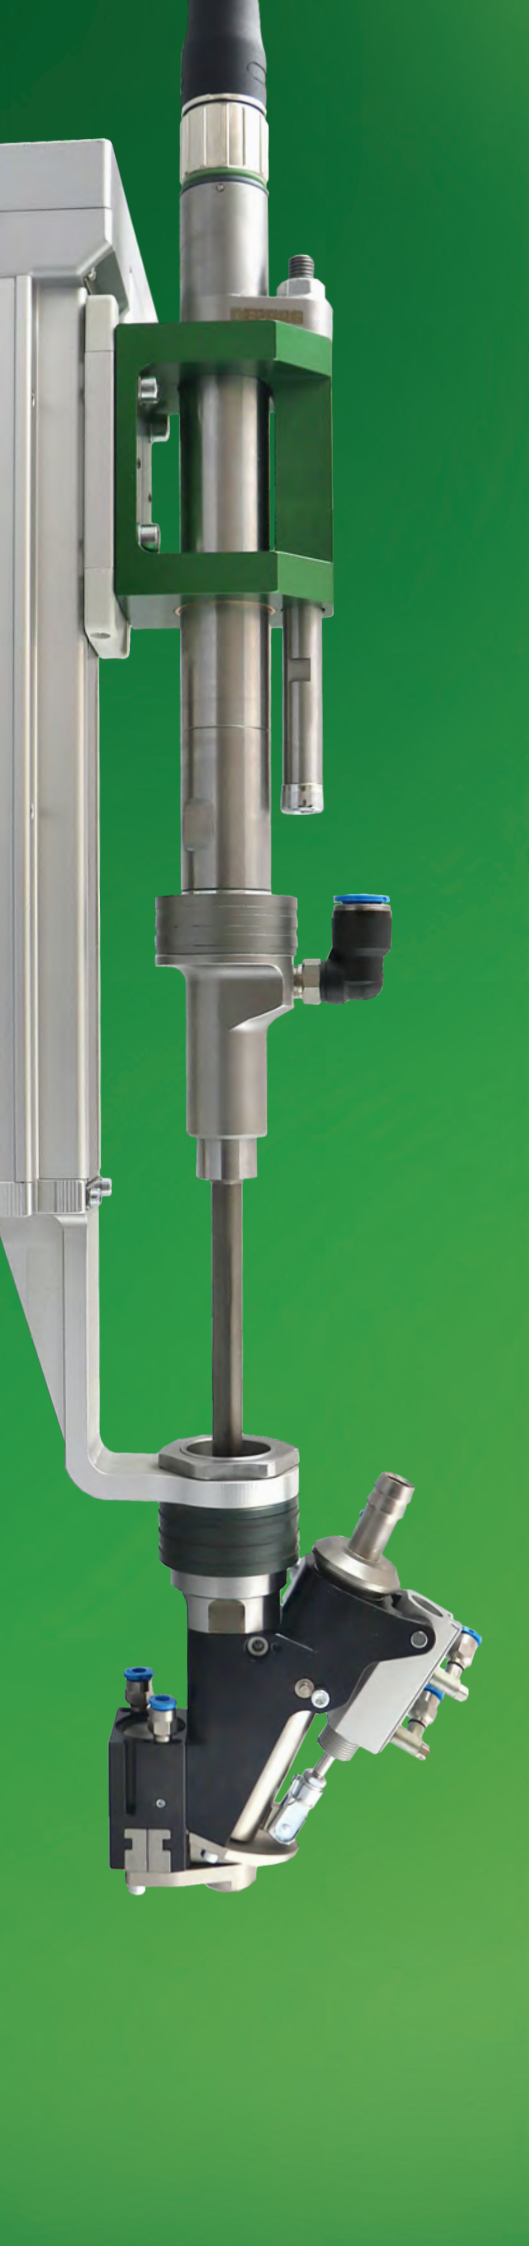


# ADVANTAGES

## > Flexibility

The Screwdriver Function Module with electronic stroke (E-SFM) has been optimally designed to react flexibly to complex screwdriving tasks, new fasteners and varying assembly requirements.

## > Precise parameter control

- force
- speed
- position

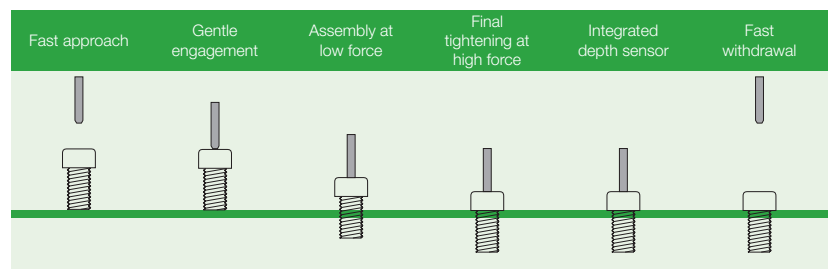

## > Process reliability

Avoid applying unnecessary stress to your component by optimally adjusting force and speed in your screwdriving application. A gentle engagement process will extend the life of your bit.

## > Improved cycle time

Flexible positioning of the bit enables different processing steps to be combined with one another. This can improve the cycle time and increase the productivity of your application.

## > One system – many screwdriving directions

Whether downwards or upwards, horizontally or at a particular angle – the E-SFM can do the job without losing the fastener position.

## > Integrated depth sensor

The E-SFM can be flexibly programmed and is therefore suitable for various screw heights.


## > Suitable for lightweight robots

Due to its low weight, the E-SFM is ideal for use in applications in conjunction with lightweight robots.

## > E-SFM manager


Simple parameterisation software in responsive design.

## Versions




### Without feeding

- if the fastener is pre-positioned




### With Pick-and-Place

- if the fastener is fed using pick-and-place or via hose and precisely positioned using vacuum tube

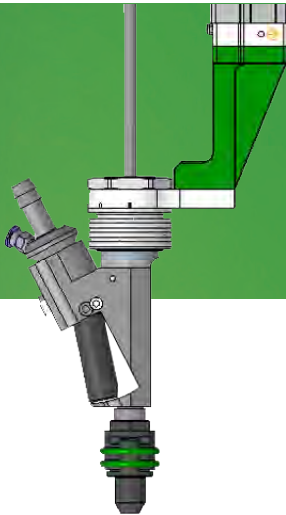


### With feeding

- tiltable mouthpiece

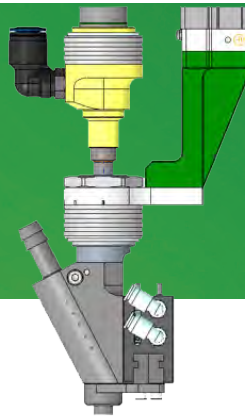


### With feeding

- mouthpiece with active nosepiece jaws (MAS)

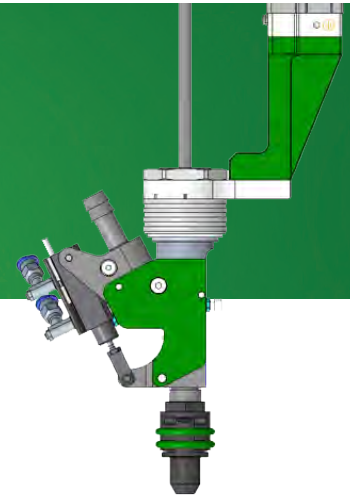


### With feeding

- swivel mouthpiece

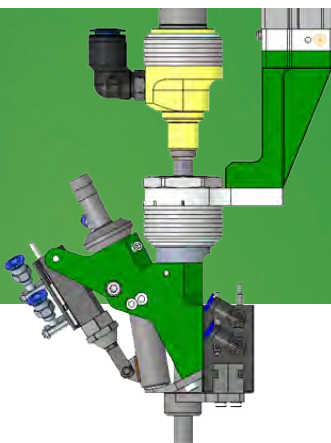

### With feeding

- mouthpiece with active nosepiece jaws swivel (MASS)

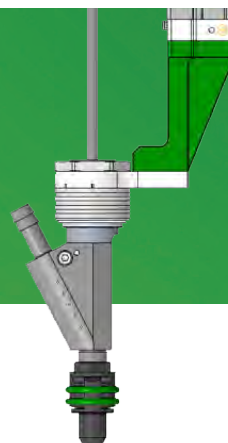


### With feeding


- rigid mouthpiece

## Versions


Without feeding




Pick-and-Place




With feeding  
tiltable mouthpiece

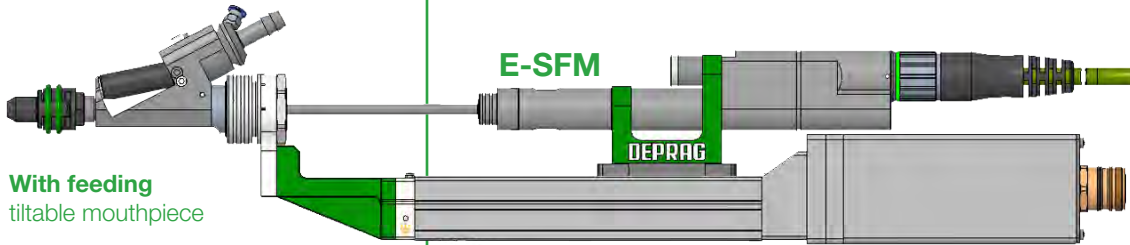


With feeding  
MAS




With feeding  
swivel mouthpiece

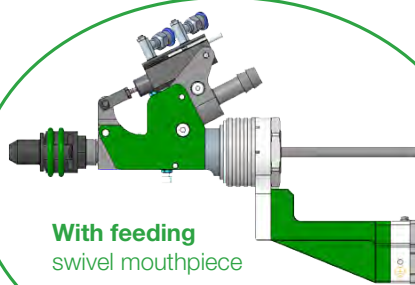

With feeding  
MASS


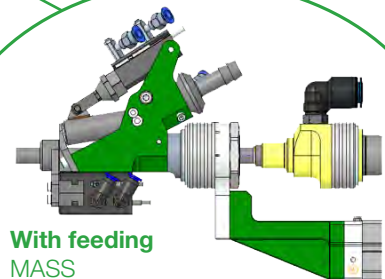


With feeding  
rigid mouthpiece

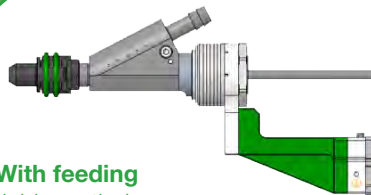





## Overview

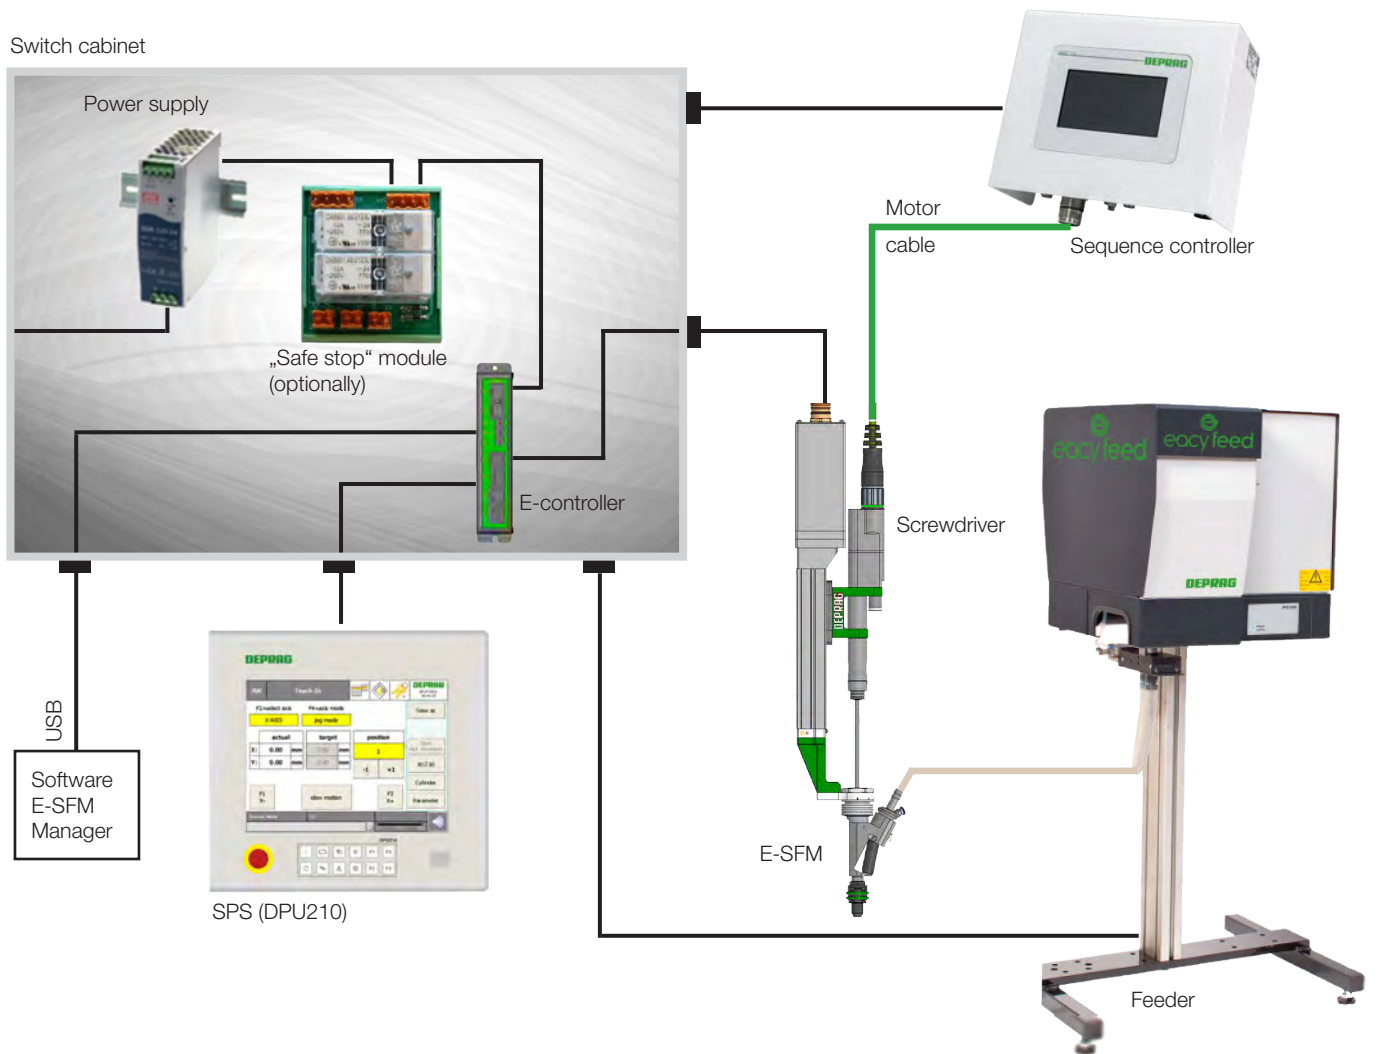

Motor attachment axial

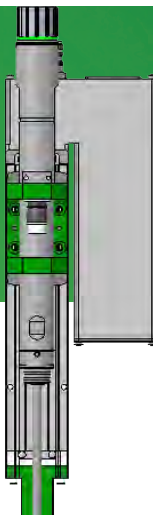

Motor attachment left

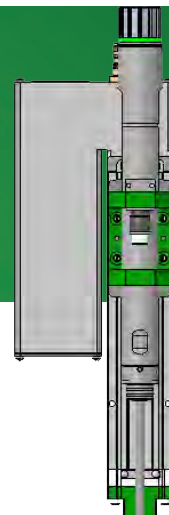

Motor attachment right

## Technical data

Screwdriver Function Module with electronic stroke (E-SFM)		
Screw head-ø max.	mm	14
Torque range	Nm	01 - 18
Shaft-ø max.		M8
Nut max.		M6
Nosepiece length	mm	40/80
Free stroke for vacuum	mm	50/100
Installation position / working direction		any
Linear axis		
Size		16/25
Stroke	mm	100/150/200/250
Motor attachment		axial/left/right
Positioning accuracy	mm	± 0,02
Speed max.	mm/s	700
Pressure force <sup>1)</sup> max.	N	45/190
Pressure force <sup>1)</sup> min.	N	1% of the max. value
Feed versions		Without feeding Pick-and-Place With feeding - rigid mouthpiece With feeding - tiltable mouthpiece With feeding - swivel mouthpiece With feeding - mouthpiece with active nosepiece jaws With feeding - mouthpiece with active nosepiece jaws swivel

<sup>1)</sup> The attainable pressure force is dependent on the installation position / working direction.

## Accessories

Required Accessories for the Screwdriver Function Module with electronic stroke (E-SFM)			
E-Control	E-SFM digital inputs/outputs	Part no.	119007A
E-Control	E-SFM EtherCAT	Part no.	119007B
E-Control	E-SFM Profinet	Part no.	119007C
E-Control	E-SFM EtherNet/IP	Part no.	119007D
E-Control	E-SFM IO-Link	Part no.	119007E
Motor cable	E-SFM length 5m	Part no.	165874
Motor cable	E-SFM length 8m	Part no.	1658741
Motor cable	E-SFM length 12m	Part no.	1658742
Cable	Programming E-Control E-SFM	Part no.	171606

## Accessories

### Software E-SFM Manager (included in delivery) - material no. 192336

The E-SFM Manager is used for parameter adjustment of travel programs (sequences), as well as to save these defined sequences on the E-Control.

The software download is available from the myDEPRAG customer portal ([my.deprag.com](http://my.deprag.com)). Registered users can activate the activation code and manage licences in MY ACCOUNT > DEPRAG Apps.



### Optionally available software products

Software TIA Link (activation key)	Material no.	135839
Software TwinCAT Link (activation key)	Material no.	140996

### Optional component for the installation into a switch cabinet - material no. 105452A

#### „Safe stop“ module



The “Safe stop” module disconnects the power supply to the linear axis. Power supply for the E-control remains unchanged. Disconnection is implemented with two channels with feedback contacts so that a performance level PL e in accordance with DIN EN ISO 13849-1 with a PFH [1/h] of 4.29E-8 is achieved.

# DEPRAG

**DEPRAG SCHULZ GMBH u. CO. KG**

P.O. Box 1352 | D-92203 Amberg

Carl-Schulz-Platz 1 | D-92224 Amberg

Phone: +49 9621 371-0 | Fax: +49 9621 371-120

[www.deprag.com](http://www.deprag.com) | [info@deprag.de](mailto:info@deprag.de)

D0062E | 09.2022

© DEPRAG. All rights and technical alterations reserved – Fri